

GULF INTRACOASTAL WATERWAY

PORT ALLEN TO MORGAN CITY ALTERNATE ROUTE



FY 2021 MAINTENANCE DREDGING

PROJECT: Gulf Intracoastal Waterway
SUBPROJECT: Port Allen to Morgan City
Alternate Route
OPERATIONS MANAGER: Victor Landry
PHONE: (504)862-2407
LOCAL SPONSOR: U.S. Government has
sufficient interest

DESCRIPTION OF WORK:

Maintain 12' x 125' channel from Mile 33
to 37 below Bayou Sorrel Lock (with an
additional 3' of advance maintenance)

HISTORICAL DREDGING FREQUENCY:

As Needed

LAST DREDGED: 2018, contract ongoing

TYPE OF DREDGE: Cutterhead, Bucket Dredge

ESTIMATED QUANTITY: 400,000 CY

ESTIMATED COST: \$2,500,000

ADVERTISE: TBD

OPEN BIDS: TBD

AWARD: TBD

START WORK: TBD


DURATION: 30 days

DREDGING REACH: Mile 33-37

DISPOSAL AREA: Upland

DISPOSAL TYPE: Upland Confined

REMARKS: Federal Standard

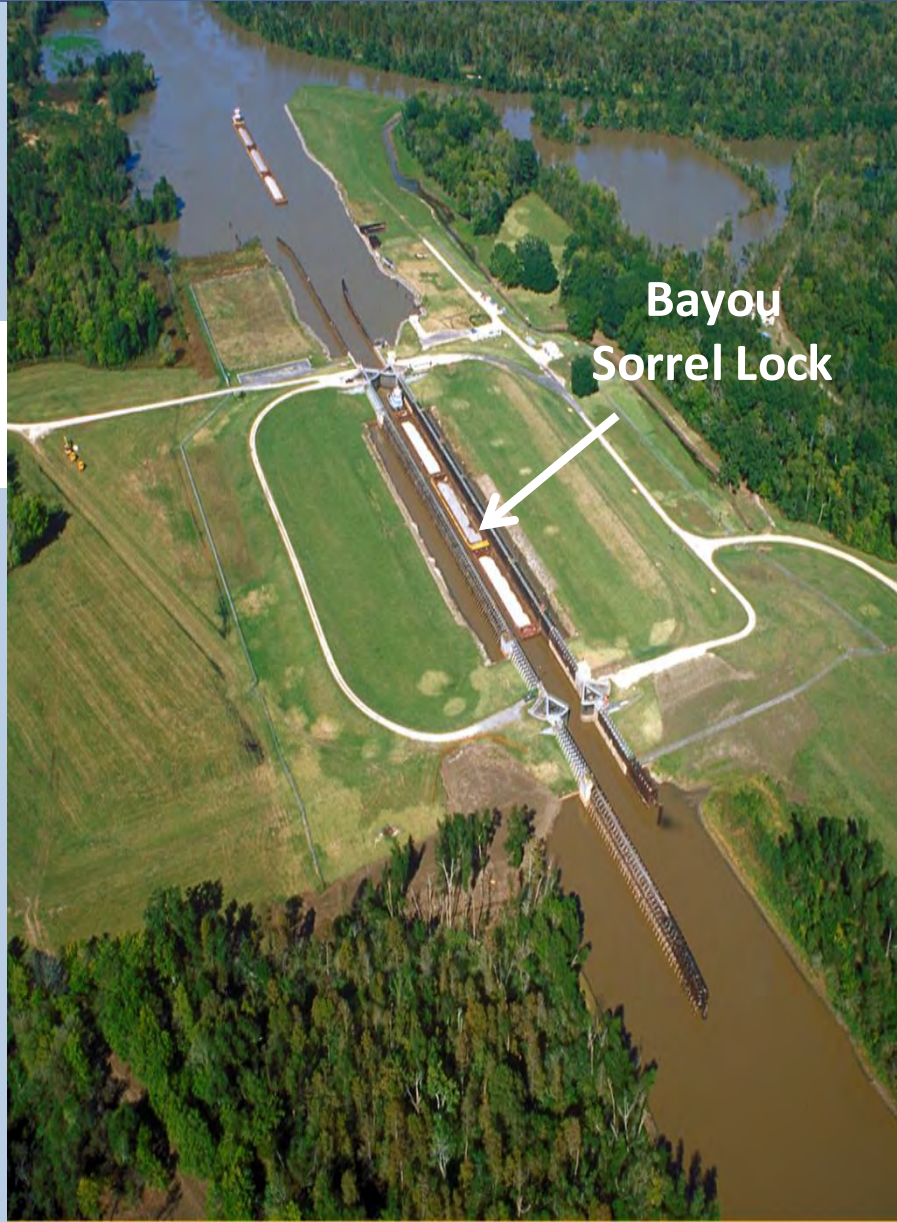

Fiscal Year	Disposal Area	Dredging Quantity (CY)
2001	CDF	195,111
2002	CDF	100,711
2003	CDF	283,940
2004-2005	NO DREDGING	
2006	CDF	433,198
2007-2010	NO DREDGING	
2011	CDF	267,202
2018	CDF	198,118

CDF= Upland Confined Disposal Facility

BAYOU SORREL LOCK

- Dredging Reach
- Upland Confined Placement Area

