


# ATCHAFALAYA BASIN BERWICK BAY HARBOR FY 2016 Maintenance Dredging

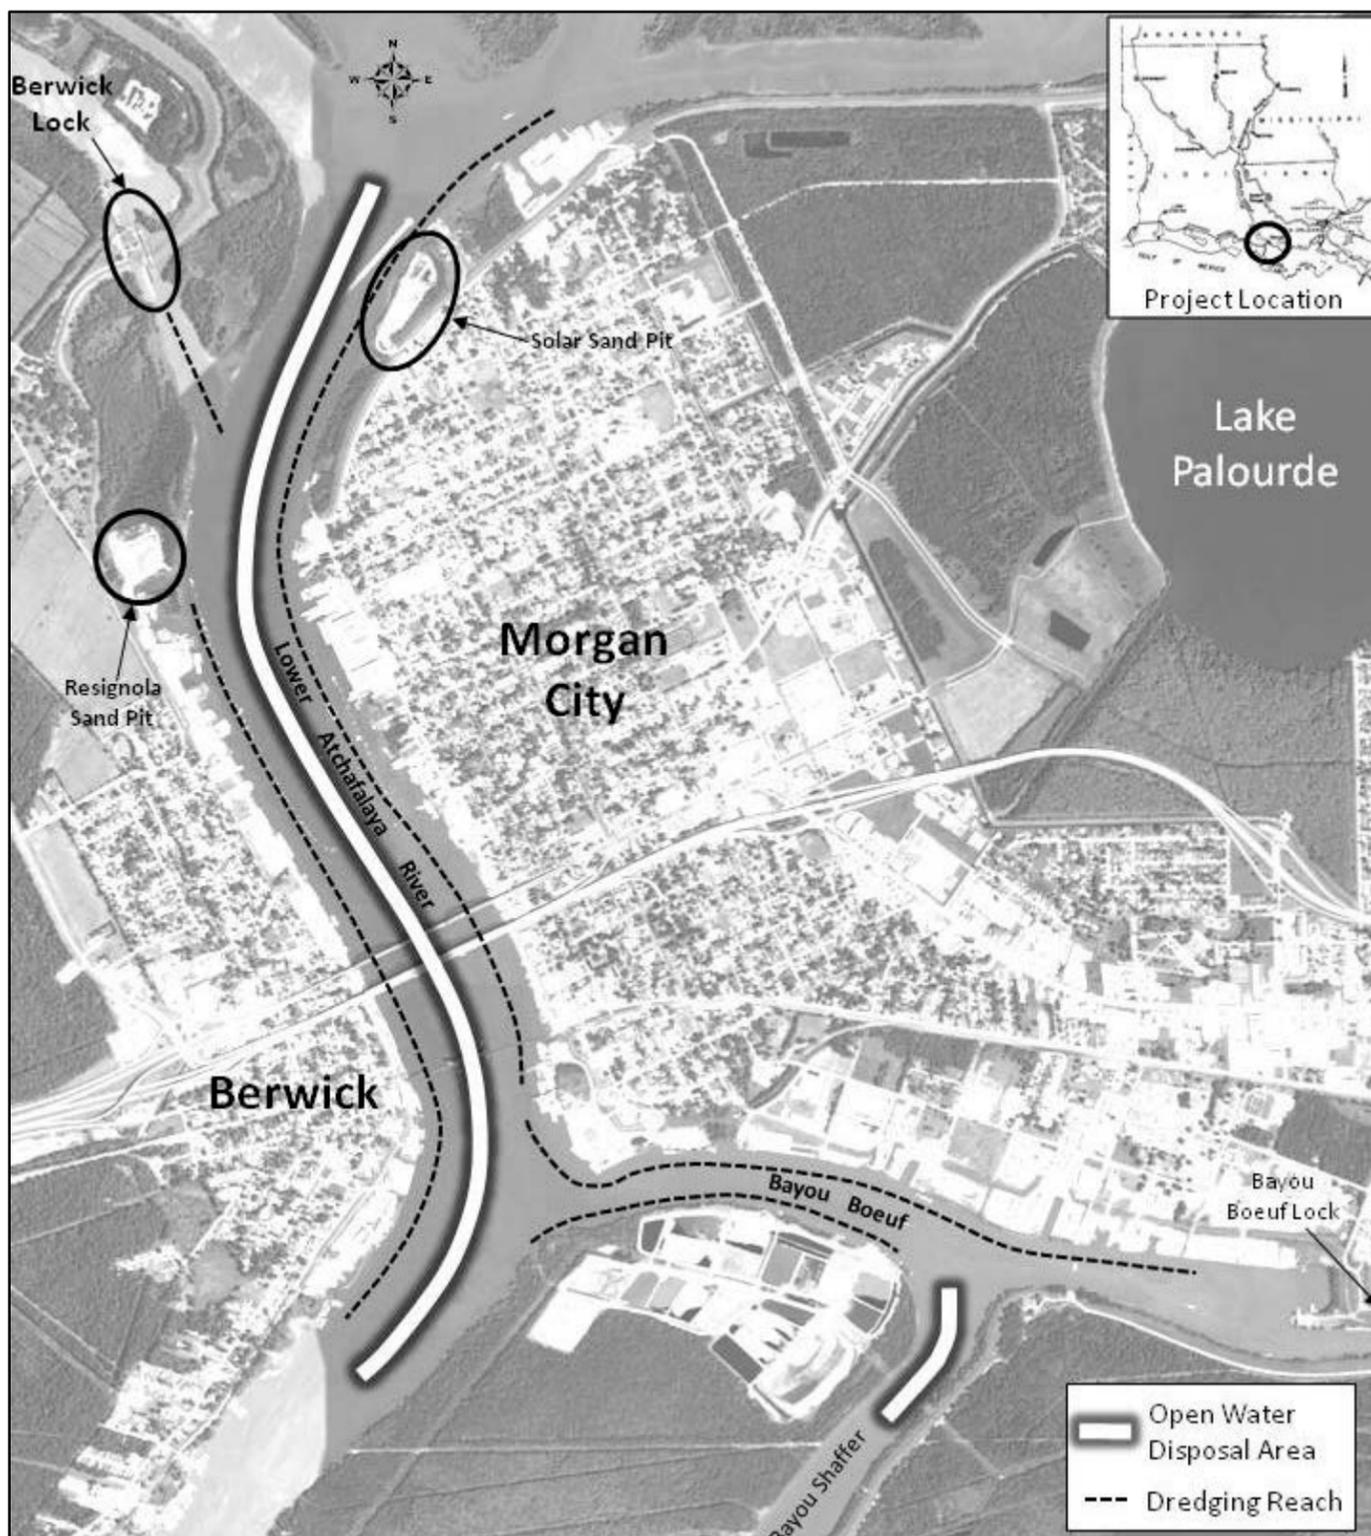

<b>PROJECT</b>	Atchafalaya Basin, LA
<b>DESCRIPTION OF WORK</b>	Maintain -12' MLG depth 25' from face of the docks in Morgan City and along Bayou Boeuf, and -8' MLG in the Berwick Lock Forebay (with an additional 4' of advance maintenance).
<b>OPERATIONS MANAGER</b>	Mike Lowe: (504) 862-1682
<b>LOCAL SPONSOR</b>	Morgan City Harbor – Terminal District

<b>DREDGING FREQUENCY</b>	Annual
<b>LAST DREDGED</b>	2014
<b>TYPE OF DREDGE USED</b>	Cutterhead

<b>CONTRACT SCHEDULE</b>	<b>Advertise:</b> Apr 2016	<b>Open Bids:</b> TBD	<b>Award:</b> TBD	<b>Start Work:</b> TBD	<b>Duration:</b> 90-210 days
<b>ESTIMATED QUANTITY</b>	1,000,000 CY				
<b>ESTIMATED COST</b>	\$4,500,000				

<b>DREDGING REACH</b>	Berwick Bay Harbor / Berwick Bay Lock Forebay / 20 Grand Point / Tidewater Point / Morgan City Wharves
<b>DISPOSAL AREAS</b>	1) Atchafalaya River / Bayou Shaffer 2) Commercial Sand Pits
<b>DISPOSAL TYPE</b>	1) Open Water (Dredged material discharged beyond 32' depth contour of Atchafalaya River and/or Bayou Shaffer). 2) Commercial Sand Pits located adjacent to the river.
<b>SEDIMENT CHARACTERISTICS</b>	Sand: 25% Silt-Clay: 75%

TYPE of BU PLACEMENT	REASON for NON-BU PLACEMENT
Wetland Creation	X Remote Location
Bird Island	Unsuitable Material (Fluff)
Beach Nourishment	Hopper Dredge Required