


**LOWER ATCHAFALAYA RIVER
CREWBOAT CUT
FY 2016 Maintenance Dredging**

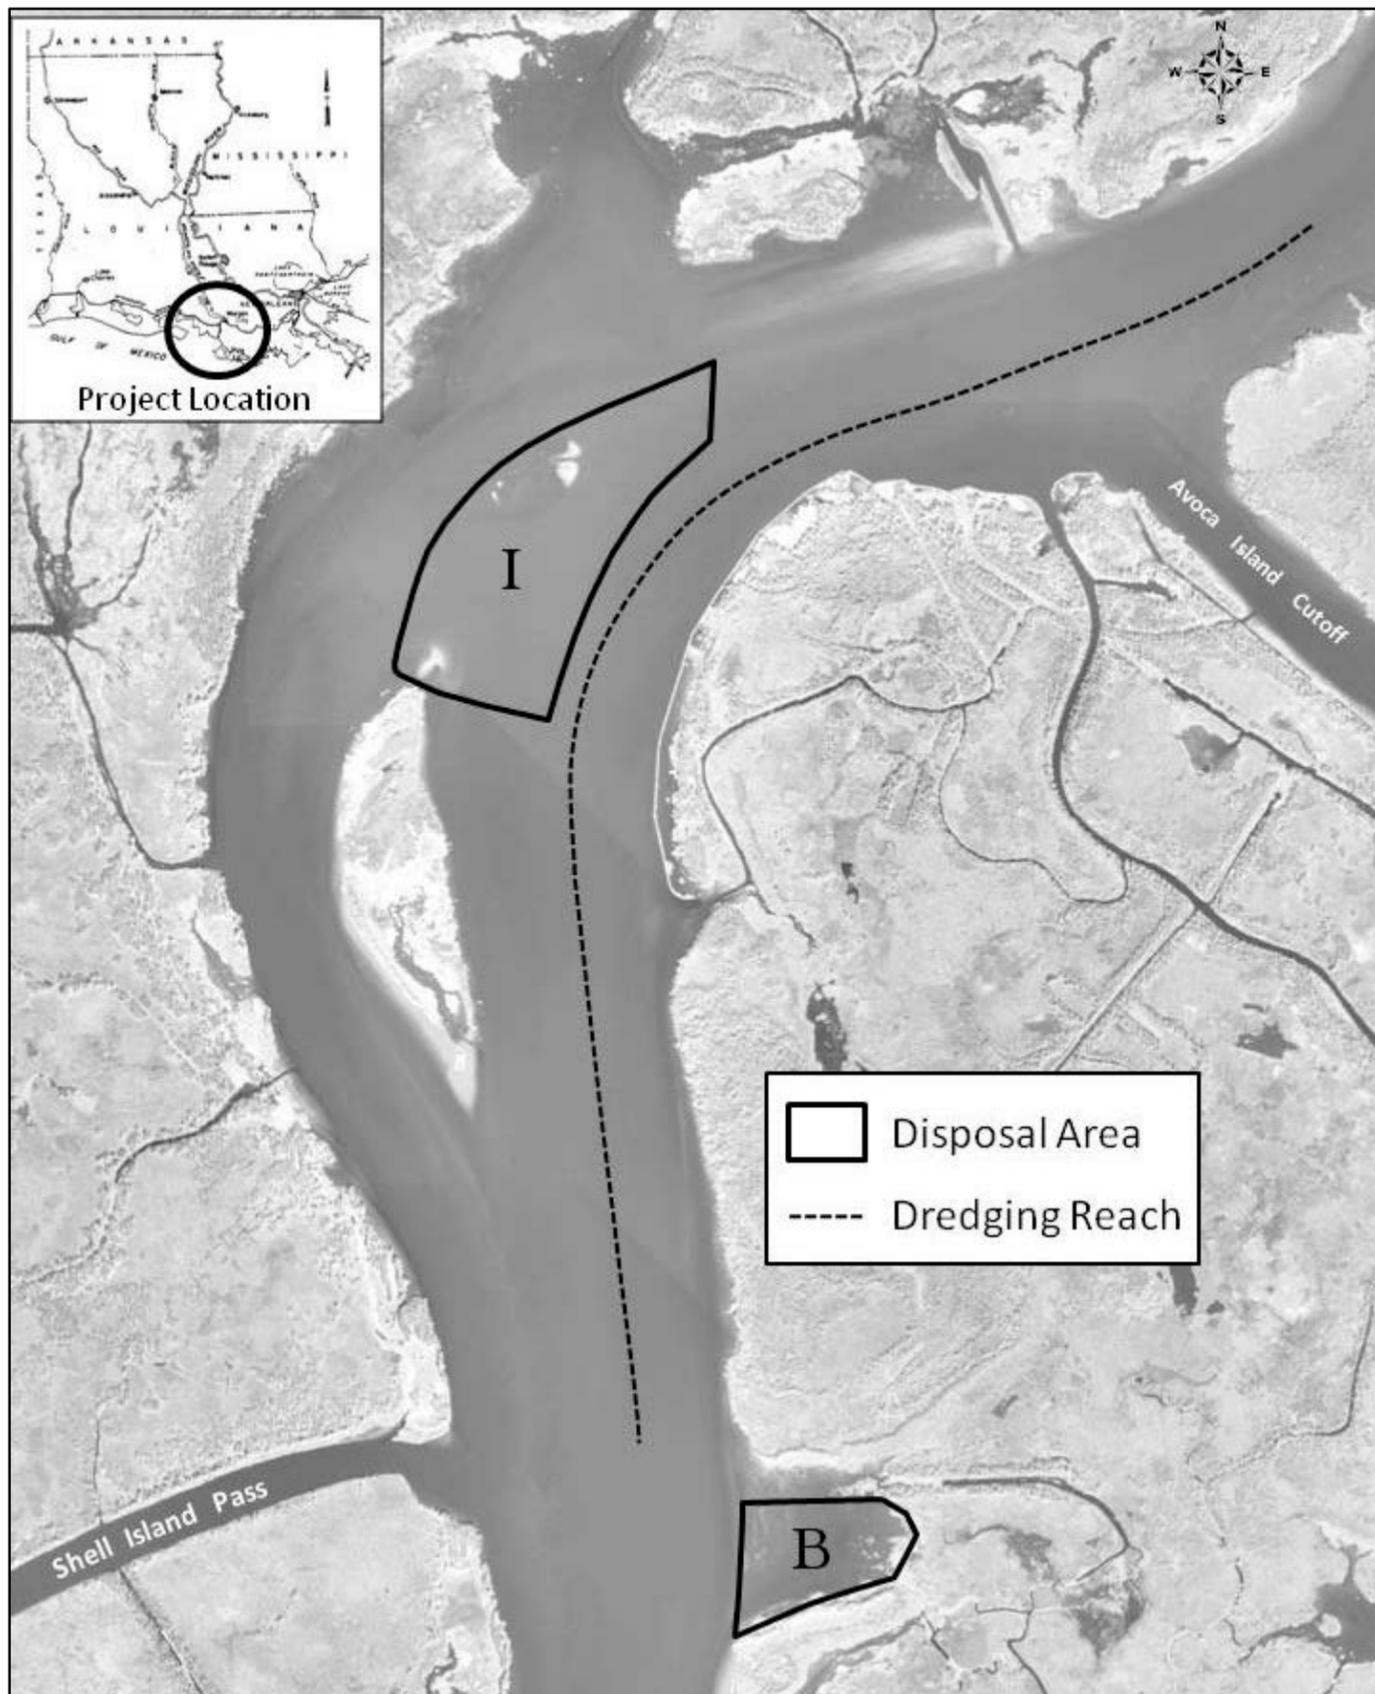

PROJECT	Atchafalaya River and Bayous Chene, Beouf, and Black, LA				
DESCRIPTION OF WORK	Maintain a 20' deep x 400' wide channel from the junction of the Avoca Island Cutoff Bayou channel to Atchafalaya Bay (with an additional 2' of advance maintenance)				
OPERATIONS MANAGER	Mike Lowe (504-862-1682)				
LOCAL SPONSOR	Morgan City Harbor –Terminal District				

DREDGING FREQUENCY	Annual
LAST DREDGED	2014
TYPE OF DREDGE USED	Cutterhead

CONTRACT SCHEDULE	Advertise: Jun 2016	Open Bids: TBD	Award: TBD	Start Work: TBD	Duration: 20 days
ESTIMATED QUANTITY	200,000 CY				
ESTIMATED COST	TBD				

DREDGING REACH	Crewboat Cut
DISPOSAL AREAS	Disposal Area "I" located between the Atchafalaya River Navigation Channel and Crewboat Cut
DISPOSAL TYPE	Open Water (unconfined for wetland creation)
SEDIMENT CHARACTERISTICS	Sand: 80% Silt: 18% Clay: 2%

	TYPE of BU PLACEMENT	REASON for NON-BU PLACEMENT
X	Wetland Creation	Remote Location
	Bird Island	Unsuitable Material (Fluff)
	Beach Nourishment	Lack of Adequate Funds