


**GULF INTRACOASTAL WATERWAY
INNER HARBOR NAVIGATION CANAL LOCK FOREBAY
FY 2016 Maintenance Dredging**

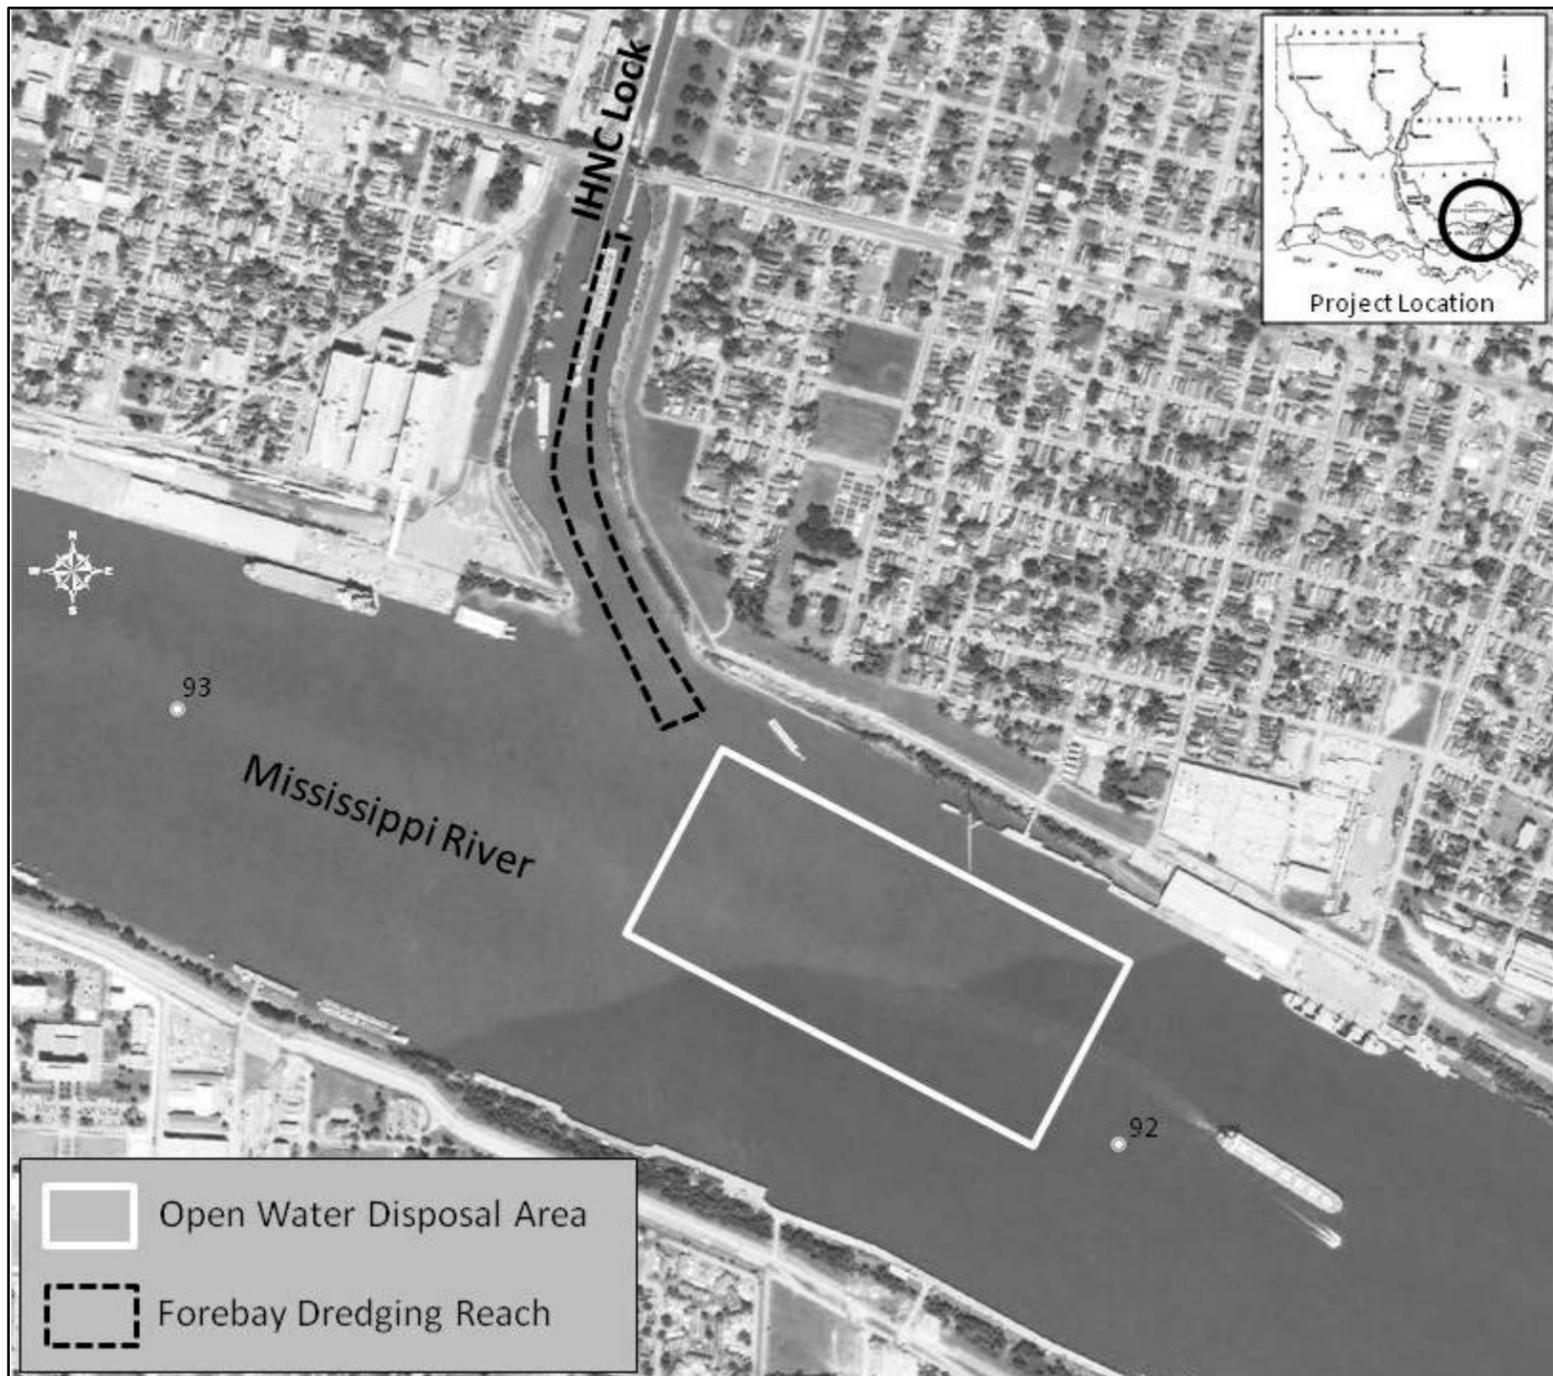

| | |
|----------------------------|---|
| PROJECT | Gulf Intracoastal Waterway, LA |
| DESCRIPTION OF WORK | Maintain Inner Harbor Canal Lock forebay to -31.5' MLG depth (with an additional 3' of advance maintenance) |
| OPERATIONS MANAGER | Victor Landry (504-862-2407) |
| LOCAL SPONSOR | U.S. Government has sufficient interest |

| | |
|----------------------------|------------|
| DREDGING FREQUENCY | Annual |
| LAST DREDGED | 2014 |
| TYPE OF DREDGE USED | Cutterhead |

| | | | | | |
|---------------------------|----------------------------|-----------------------|-------------------|------------------------|-------------------------|
| CONTRACT SCHEDULE | Advertise: Jul 2016 | Open Bids: TBD | Award: TBD | Start Work: TBD | Duration: 7 days |
| ESTIMATED QUANTITY | 75,000 CY | | | | |
| ESTIMATED COST | \$500,000 | | | | |

| | |
|---------------------------------|--|
| DREDGING REACH | IHNC Lock forebay |
| DISPOSAL AREAS | Mississippi River |
| DISPOSAL TYPE | Open Water (beyond the -55 foot depth contour) |
| SEDIMENT CHARACTERISTICS | Sand: % Silt: % Clay: % |

| TYPE of BU PLACEMENT | REASON for NON-BU PLACEMENT |
|----------------------|--|
| Wetland Creation | <input checked="" type="checkbox"/> Remote Location |
| Bird Island | <input type="checkbox"/> Unsuitable Material (Fluff) |
| Beach Nourishment | <input type="checkbox"/> Hopper Dredge Required |