


**GULF INTRACOASTAL WATERWAY  
WAX LAKE CROSSOVER  
FY 2016 Maintenance Dredging**

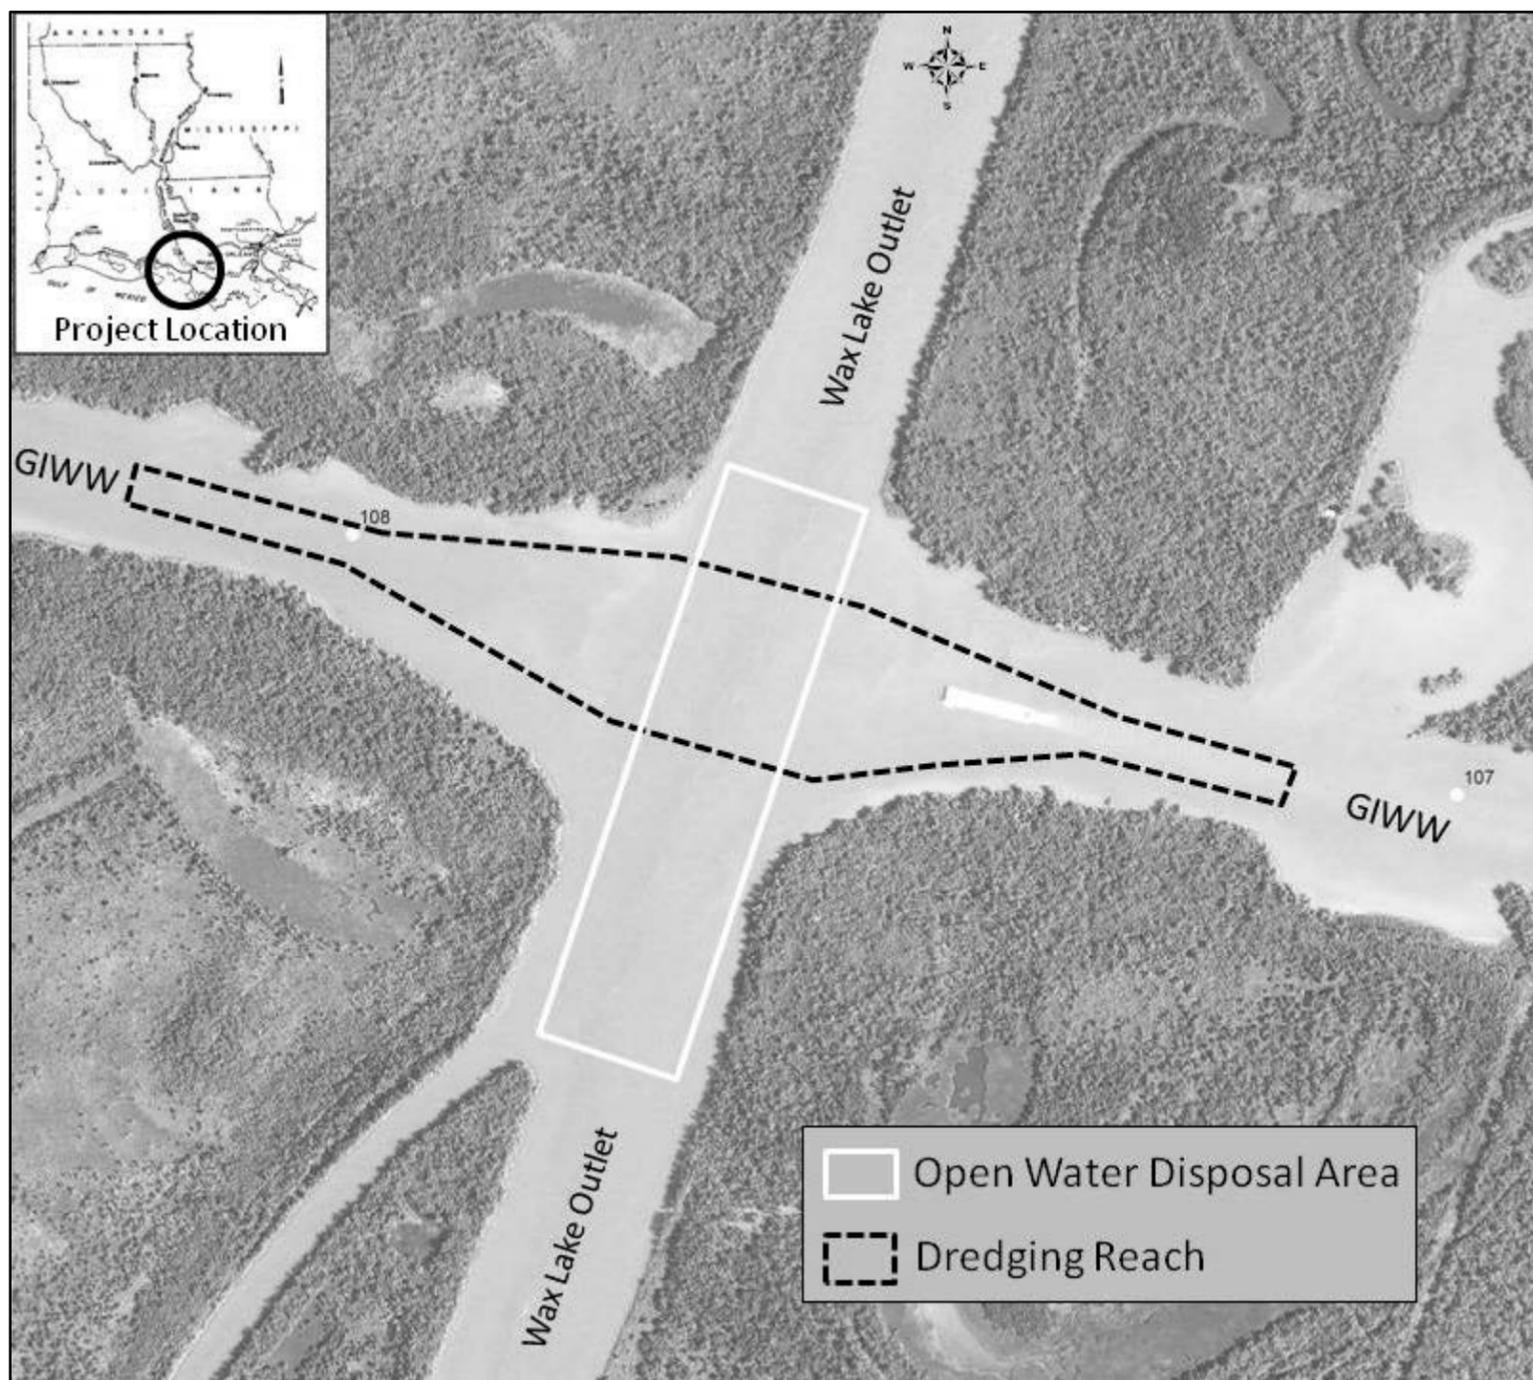

<b>PROJECT</b>	Gulf Intracoastal Waterway, LA
<b>DESCRIPTION OF WORK</b>	Maintain 12' deep x 125' wide channel at the intersection of the GIWW and the Wax Lake Outlet (with an additional 3' of advance maintenance)
<b>OPERATIONS MANAGER</b>	Victor Landry (504-862-2407)
<b>LOCAL SPONSOR</b>	U.S. Government has sufficient interest

<b>DREDGING FREQUENCY</b>	Annually
<b>LAST DREDGED</b>	2014
<b>TYPE OF DREDGE USED</b>	Cutterhead or Bucket Dredge

<b>CONTRACT SCHEDULE</b>	<b>Advertise:</b> Apr 2016	<b>Open Bids:</b> TBD	<b>Award:</b> TBD	<b>Start Work:</b> TBD	<b>Duration:</b> 7-10 days
<b>ESTIMATED QUANTITY</b>	200,000 CY				
<b>ESTIMATED COST</b>	\$700,000				

<b>DREDGING REACH</b>	Intersection of the GIWW and the Wax Lake Outlet
<b>DISPOSAL AREAS</b>	Wax Lake Outlet (beyond the -32' Depth Contour)
<b>DISPOSAL TYPE</b>	Open Water
<b>SEDIMENT CHARACTERISTICS</b>	Sand: % Silt: % Clay: %

TYPE of BU PLACEMENT	REASON for NON-BU PLACEMENT
Wetland Creation	<b>X</b> Remote Location
Bird Island	Unsuitable Material (Fluff)
Beach Nourishment	Hopper Dredge Required