

GULF INTRACOASTAL WATERWAY PORT ALLEN TO MORGAN CITY ALTERNATE ROUTE




FY 2017 MAINTENANCE DREDGING
PROJECT: Gulf Intracoastal Waterway
SUBPROJECT: Port Allen to Morgan City
Alternate Route
OPERATIONS MANAGER: Victor Landry
PHONE: (504) 862-2407
LOCAL SPONSOR: U.S. Government has
sufficient interest

DESCRIPTION OF WORK:
Maintain 12' x 125' channel from Mile 33
to 37 below Bayou Sorrel Lock (with an
additional 3' of advance maintenance)

HISTORICAL DREDGING FREQUENCY:
As Needed
LAST DREDGED: 2011
TYPE OF DREDGE: Cutterhead, Bucket Dredge
ESTIMATED QUANTITY: 400,000 CY
ESTIMATED COST: \$2,500,000

ADVERTISE: May 2017
OPEN BIDS: TBD
AWARD: TBD
START WORK: TBD
DURATION: 21 days

DREDGING REACH: Mile 33-37
DISPOSAL AREA: Upland
DISPOSAL TYPE: Upland Confined
REMARKS: Federal Standard

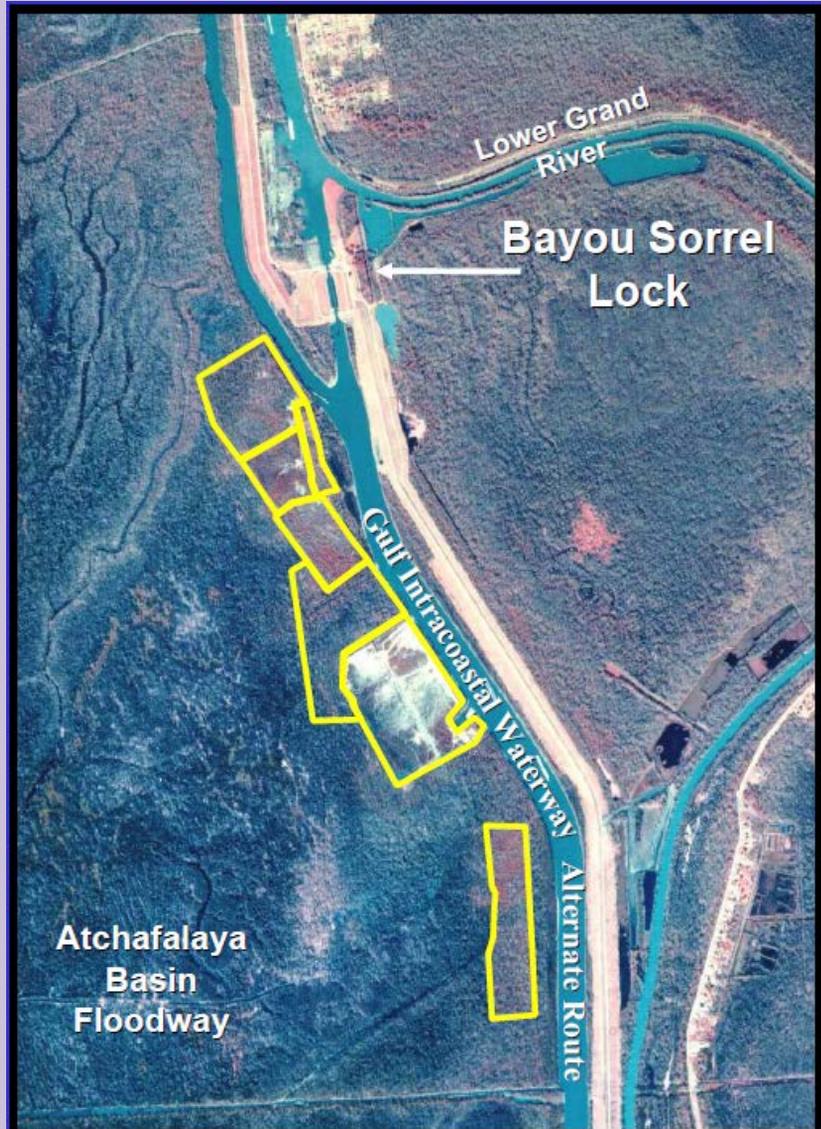

GULF INTRACOASTAL WATERWAY PORT ALLEN TO MORGAN CITY ALTERNATE ROUTE

Fiscal Year	Disposal Area	Dredging Quantity (CY)
2001	CDF	195,111
2002	CDF	100,711
2003	CDF	283,940
2004-2005	NO DREDGING	
2006	CDF	433,198
2007-2010	NO DREDGING	
2011	CDF	267,202

CDF= Upland Confined Disposal Facility

