


GULF INTRACOASTAL WATERWAY WAX LAKE OUTLET

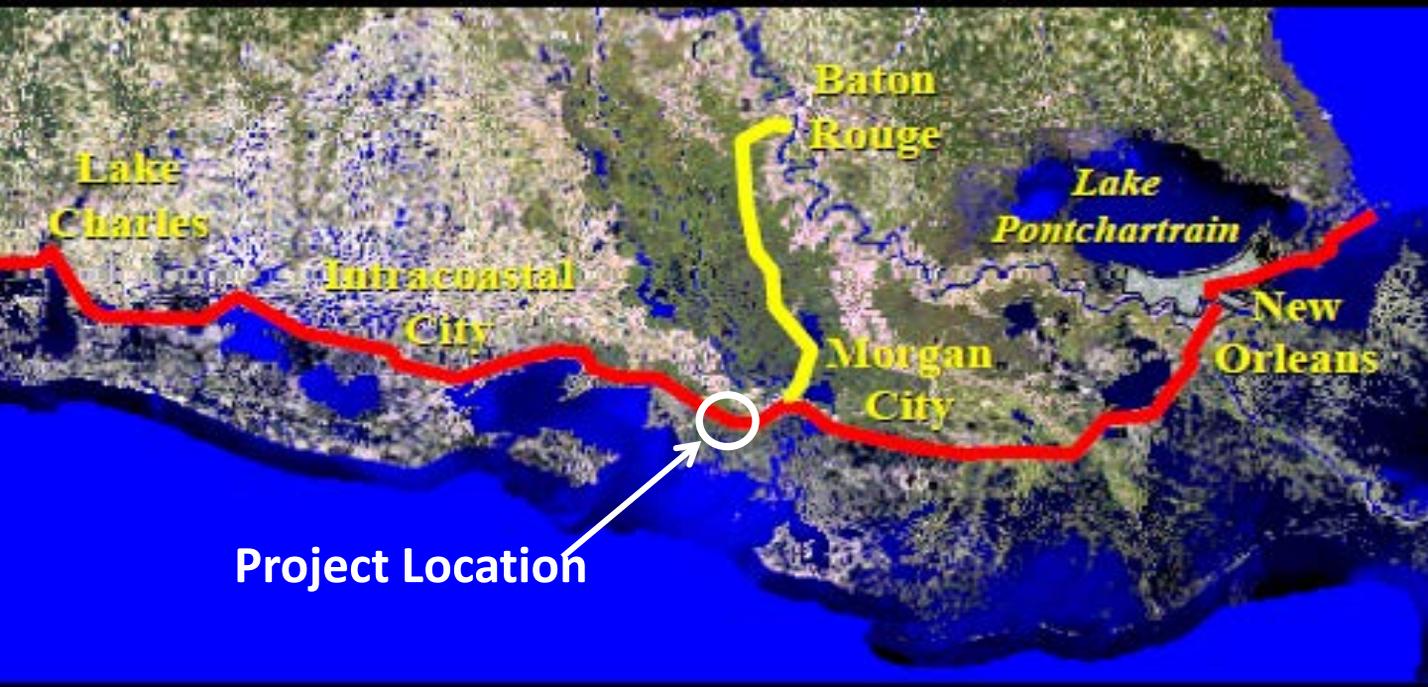

Project Location

FY 2017 MAINTENANCE DREDGING

PROJECT: Gulf Intracoastal Waterway
SUBPROJECT: Wax Lake Outlet Crossover
OPERATIONS MANAGER: Victor Landry
PHONE: (504) 862-2407
LOCAL SPONSOR: U.S. Government has sufficient interest

DESCRIPTION OF WORK:

Maintain 12' x 125' channel at the intersection of the GIWW and the Wax Lake Outlet (with an additional 3' of advance maintenance)

HISTORICAL DREDGING FREQUENCY: Annually

LAST DREDGED: 2016

TYPE OF DREDGE: Cutterhead/Bucket

ESTIMATED QUANTITY: 200,000 CY

ESTIMATED COST: \$800,000

ADVERTISE: April 2017

OPEN BIDS: Depends on River Conditions

AWARD: TBD

START WORK: TBD

DURATION: 7-10 days

DREDGING REACH: Intersection of GIWW and Wax Lake Outlet

DISPOSAL AREA: Wax Lake Outlet

DISPOSAL TYPE: Open Water

REMARKS: Dredged Material discharged beyond the -32' Depth Contour



BENEFICIAL USE OF DREDGED MATERIAL GULF INTRACOASTAL WATERWAY WAX LAKE OUTLET

Fiscal Year	Disposal Area	Dredging Quantity (CY)
2001	Wax Lake Outlet Open Water	63,319
		86,164
2002	Wax Lake Outlet Open Water	141,562
		122,607
2003	Wax Lake Outlet Open Water	131,604
2004	Wax Lake Outlet Open Water	173,005
2005	Wax Lake Outlet Open Water	88,964
2006	Wax Lake Outlet Open Water	17,393
2007	Wax Lake Outlet Open Water	141,100
2008	Wax Lake Outlet Open Water	119,800
2009	Wax Lake Outlet Open Water	251,479
2010	Wax Lake Outlet Open Water	133,115
2011	Wax Lake Outlet Open Water	228,896
2013	Wax Lake Outlet Open Water	91,820
2015	Wax Lake Outlet Open Water	164,527
2016	Wax Lake Outlet Open Water	124,099

