

FY 2015 MAINTENANCE DREDGING

PROJECT: Bayou LaFourche
SUBPROJECT: Port Fourchon
OPERATIONS MANAGER: Don Schneider
PHONE: (504) 862-1828
LOCAL SPONSOR: Jefferson Parish, LA


DESCRIPTION OF WORK: Reduced Dimensions
Maintain a 24' x 300' channel from Mile Inland Reach (3.4 to Mile 0.0) (with an additional 3' of advance maintenance)
Maintain a 26' x 300' channel from Mile Bar Channel (Mile 0.0 to Mile -1.8) (with an additional 4' of advance maintenance).

HISTORICAL DREDGING FREQUENCY: Biennially
LAST DREDGED: 2014
TYPE OF DREDGE: Cutterhead
ESTIMATED QUANTITY: 625,000 CY
ESTIMATED COST: \$2,000,000- \$5,000,000

ADVERTISE: Dec 2014
OPEN BIDS: Mar 2015
AWARD: Mar 2015
START WORK: April 2015
DURATION: 30 days

DREDGING REACH: Mile 3.4 to -1.8
DISPOSAL AREA: Behind Jetties
DISPOSAL TYPE: Unconfined
REMARKS: Shoreline Nourishment

BAYOU LAFOURCHE PORT FOURCHON

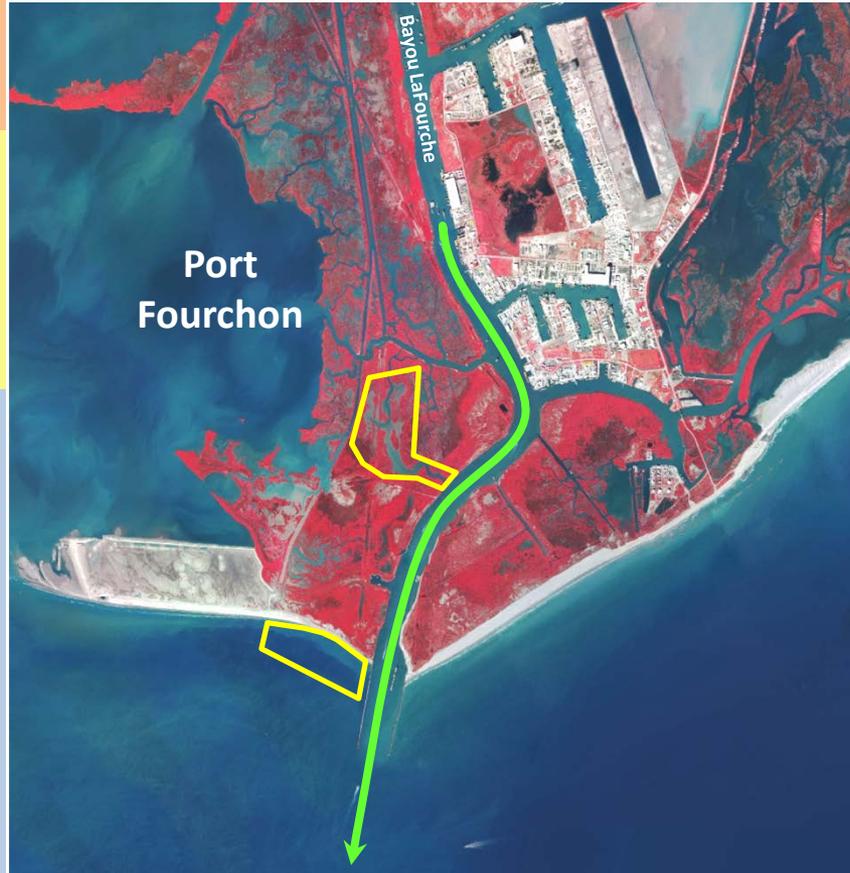

-  Dredging Reach
-  Shoreline Nourishment Placement Areas

BENEFICIAL USE OF DREDGED MATERIAL BAYOU LAFOURCHE - PORT FOURCHON

Fiscal Year	Contract No.	Disposal Area	Dredging Quantity (CY)	Acres
2001	C-0044	West Belle Pass CWPPRA	1,958,644	38
2002	NO DREDGING			
2003	C-0009	BN	388,534	20
2004	NO DREDGING			
2005	C-0002	BN	1,020,330	40
2006	C-0125	BN	605,005	25
2007	C-0213	West Belle Pass CWPPRA	426,202	130
		BN	111,515	10
2008	NO DREDGING			
2009	C-0099	BN	638,628	10
2010	NO DREDGING			
2011	NO DREDGING			
2012	C-0020	BN	353,342	12

BN= Beach Nourishment



- Dredging Reach
- Shoreline Nourishment Placement Areas